

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



5/0:09/451,167  
#12

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |    |   |
|--|----|---|
| (51) International Patent Classification <sup>6</sup> :<br>H04M 1/02, E05D 15/48 | A1 | (11) International Publication Number:<br>WO 99/43134             |
|  |    | (43) International Publication Date:<br>26 August 1999 (26.08.99) |

(21) International Application Number: PCT/EP99/00863  
(22) International Filing Date: 10 February 1999 (10.02.99)  
(30) Priority Data:  
9803341.8 17 February 1998 (17.02.98) GB  
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
[SE/SE]; S-126 25 Stockholm (SE).  
(72) Inventor: ENRIGHT, Roger, Charles, James; 39 Liddel Way,  
Chandlers Ford, Hampshire SO53 4QF (GB).  
(74) Agent: VIGARS, Christopher, Ian; Haseltine Lake & Co.,  
Imperial House, 15-19 Kingsway, London WC2B 6UD  
(GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP,  
KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK,  
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW,  
ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,  
BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN,  
TD, TG).



**Published**

*With international search report.  
Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(54) Title: HINGE ASSEMBLIES FOR ELECTRONIC DEVICES

(57) Abstract

An electronic device comprises a first housing (2) and a second housing (4) which is mounted on the first housing (2) by way of a hinge assembly (12). The hinge assembly comprises first and second cooperating parts (121, 122) attached to the first and second housings respectively. The second part (122) is rotatably and slidably engaged with the first part (121), such that the second housing (4) is rotatable with respect to the first part (2), about an axis from the closed position to a first open position of the device, and such that the second housing is linearly movable, with respect to the first housing, in a direction parallel to the axis, with respect to the first housing, from a closed position of the device to a second open position of the device.

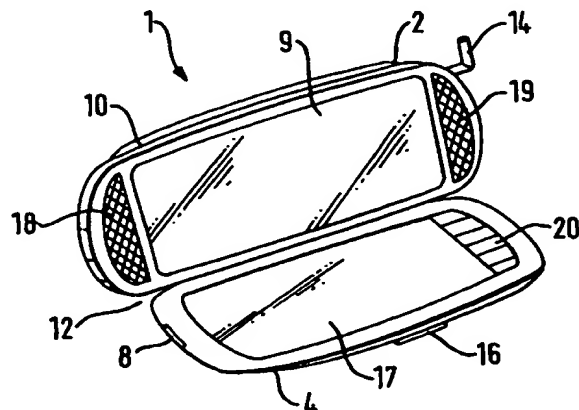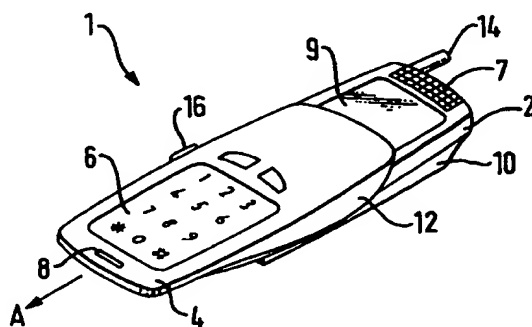

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakhstan                               | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

### HINGE ASSEMBLIES FOR ELECTRONIC DEVICES

The present invention relates to hinge assemblies for use with electronic devices. For example, but not exclusively, the present invention relates to hinge  
5 assemblies for mobile telephones and portable computers.

### DESCRIPTION OF THE RELATED ART

Many current mobile telephones make use of a  
10 hinged cover, or "flip", to enable the size of the telephone to be kept desirably small and to protect the display and keypad of the telephone when not in use. Similarly, portable computers/electronic organisers make use of hinged cases to enable a small size of  
15 device to be produced, as well as to provide protection for display and keypad components.

However, previously considered hinge assembly designs do not readily allow a mobile telephone to include portable computer/electronic organiser  
20 functions, whilst retaining the small size and ability to protect components of current separate mobile telephones and organisers.

### SUMMARY OF THE PRESENT INVENTION

25 According to a first aspect of the present invention, there is provided an electronic device comprising a first housing and a second housing which is mounted on the first housing by way of a hinge assembly, wherein the hinge assembly comprises:

30 first and second cooperating parts attached to the first and second housings respectively,

the second part being rotatably and slidably engaged with the first part, such that the second housing is rotatable with respect to the first part,  
35 about an axis from the closed position to a first open position of the device, and such that the second

-2-

housing is linearly movable, with respect to the first housing, in a direction parallel to the axis, with respect to the first housing, from a closed position of the device to a second open position of the device.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a mobile telephone including a hinge assembly embodying one aspect of the present invention, in a closed position;

10 Figure 2 shows the mobile telephone of Figure 1 in a first open position;

Figure 3 shows the mobile telephone of Figure 1 in a second open position;

15 Figures 4 and 5 show perspective and end views respectively of a first housing of the telephone of Figure 1;

Figures 6 and 7 show perspective and end views respectively of a second housing of the telephone of Figure 1;

20 Figure 8 shows a side elevation of the housing of Figures 6 and 7;

Figure 9 shows a partial end cross-sectional view of the housings of the telephone of Figure 1.

#### 25 DETAILS OF THE DESCRIPTION OF THE PREFERRED EMBODIMENT

A mobile telephone 1 is shown in Figure 1 in a closed position, and comprises first and second housings 2 and 4 which are movably attached to one another by way of a hinge assembly 12.

30 In this example, the first housing 2 carries a battery 10 and an antenna 14. The second housing member carries a keypad 6 for user input, and a microphone 8.

35 In the closed position shown in Figure 1, the second housing 4 covers the whole of an upper face of the first housing 2, and is held in place by way of a

-3-

clip 16. In this condition, the telephone is sealed, and the internal components of the telephone are protected from damage.

5 A first open position of the telephone is shown in Figure 2, in which the telephone has the usual functions of a mobile telephone, ie. sending and receiving telephone calls. To enable such use, the second housing, or cover, 4 is moved along the housing 2, so that a telephone display 9, and a loudspeaker 7  
10 are revealed for use in conventional manner by the user of the telephone. In one embodiment of the invention, the movement of the cover 4 can automatically cause the telephone to answer an incoming call, or to be put into a dialling mode (ie. an "off-hook" condition).

15 Figure 3 shows a second open position of the telephone, in which the cover 4 has been opened, from the closed position of Figure 1, about the hinge assembly 12, to reveal fully the display 9 carried by the main housing 2. The cover 4 can carry on its inner  
20 surface an input device, for example a touch sensitive scribble pad, to enable a user of the device to input data. In the example shown, speakers 18 and 19 are provided in the main housing 1 for relaying audio information to the user. In this second open position,  
25 the mobile telephone can be used as a portable computer/electronic organiser. For example, the input device can be used to input text for downloading to an office computer, or the device could be used to send facsimile message by making use of the mobile telephone  
30 functions.

The hinge assembly 12 is shown in greater detail in Figures 4 to 9.

Referring to Figure 4 and 5, the first housing 2 of the telephone carries a first part 121 of the hinge  
35 assembly 12. This first part 121 extends along at least part of one side edge region of the housing 2 by

way of a connecting portion 124. The first part 121 curves from the front edge region towards the rear edge region of one side of the telephone, thereby defining a curved internal surface 125. The curved surface 125 is for engagement with a second part of the hinge as will be described below.

The curved surface 125 carries a number of contacts 241 for providing power and function control for the telephone. The contacts are intended to connect with corresponding contacts on the second part of the hinge assembly 12.

Figure 6 shows a perspective view of the second housing 4, and Figure 7 shows an end view thereof. The second housing 4 carries a substantially cylindrical elongate second part 122 which forms the hinge pin of the hinge assembly 12. The second part 122 extends along an edge region of the second housing 4, and defines a curved external surface for engagement with the curved internal surface of the first part 121. The second part 122 carries, on the outer surface thereof, contacts 242 which are for connecting with the contacts 241 carried by the first part 121. The second part is also provided with a stop 28 for preventing excessive rotation between the two housings,

The electrical connections made by the contacts 241 and 242 are dependent upon the relative positions of the first and second housings 2 and 4, and are preferably used to determine the function of the device (ie. a mobile telephone, or portable computer). The contacts 241 and 242 can also be used for power transfer between the two housings 2 and 4 in the two open positions. In addition, a contact can be specifically provided to initiate changes in function of the telephone when the housings 2 and 4 are moved between the two open positions. The contacts can also be used for the transfer of data between components in

-5-

the two housings 2 and 4.

In order to hold the two housings 2 and 4 in place in the various positions, the first housing 2 is provided with a clip arrangement 16, and the second housing 4 is provided with two stop members 31 and 32. These stop members are shown in Figures 8 and 9.

As shown in Figure 9, a first stop member 31 is engaged with the clip 16. The clip 16 is biased to engage with the stop member concerned by way of a spring device 161. In order to release the second housing 4 from the closed position of the device, the clip 16 is pressed into the first housing 2, thereby releasing the stop member 31. The second housing 4 can then be moved along the first housing 2 until the second stop member 32 engages with the clip 16. The device is then held in the first open position.

Similarly, the clip 16 must be depressed so that the second housing 4 can be rotated about the hinge 12 in order to provide the second open position of the device.

CLAIMS

1. An electronic device comprising a first housing and a second housing which is mounted on the first housing by way of a hinge assembly, wherein the hinge assembly comprises:

first and second cooperating parts attached to the first and second housings respectively,

the second part being rotatably and slidably engaged with the first part, such that the second housing is rotatable with respect to the first part, about an axis from the closed position to a first open position of the device, and such that the second housing is linearly movable, with respect to the first housing, in a direction parallel to the axis, with respect to the first housing, from a closed position of the device to a second open position of the device.

2. A telephone as claimed in claim 1, wherein the first part of the hinge assembly is provided by a first elongate member which extends along an edge region of the first housing of the telephone, and which defines a first surface extending along the first part, and wherein the second part of the hinge assembly is provided by a second elongate member which extends along an edge region of the second housing, and which defines a second surface, the second elongate member being engaged with the first elongate member such that at least part of the first surface is in contact with the second surface.

3. A telephone as claimed in claim 2, wherein the first and second surfaces carry electrical contacts for establishing electrical connections between the first and second housings in dependence upon the relative position of the first housing with respect to the first housing.

4. A telephone as claimed in claim 2 or 3, wherein the first surface is an internal concave curved





-7-

surface, and the second surface is a corresponding external convex curved surface, the second part of the hinge assembly being at least partially held within the first part.

- 5           5.    A telephone as claimed in any one of claims 2, 3 or 4, wherein the first and second housings carry respective cooperating parts of a clip mechanism for holding the housings in a desired one of the closed, first and second open positions.

1/4

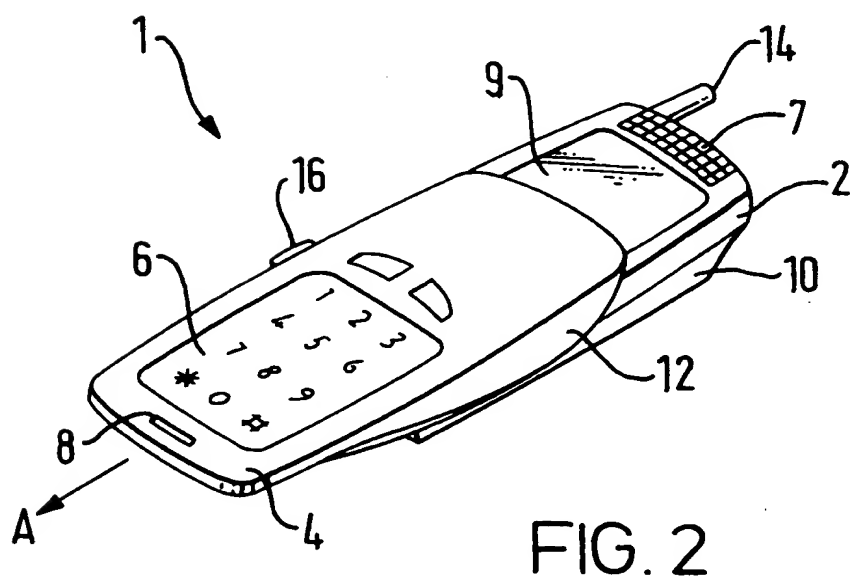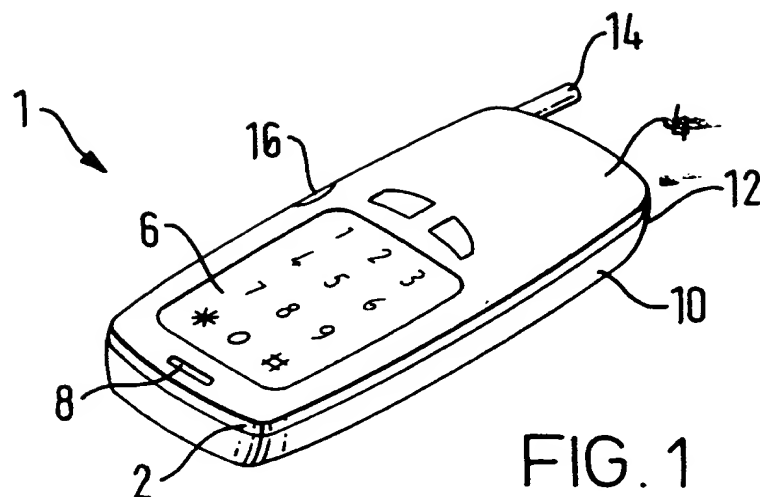

SUBSTITUTE SHEET ( rule 26 )

2 / 4

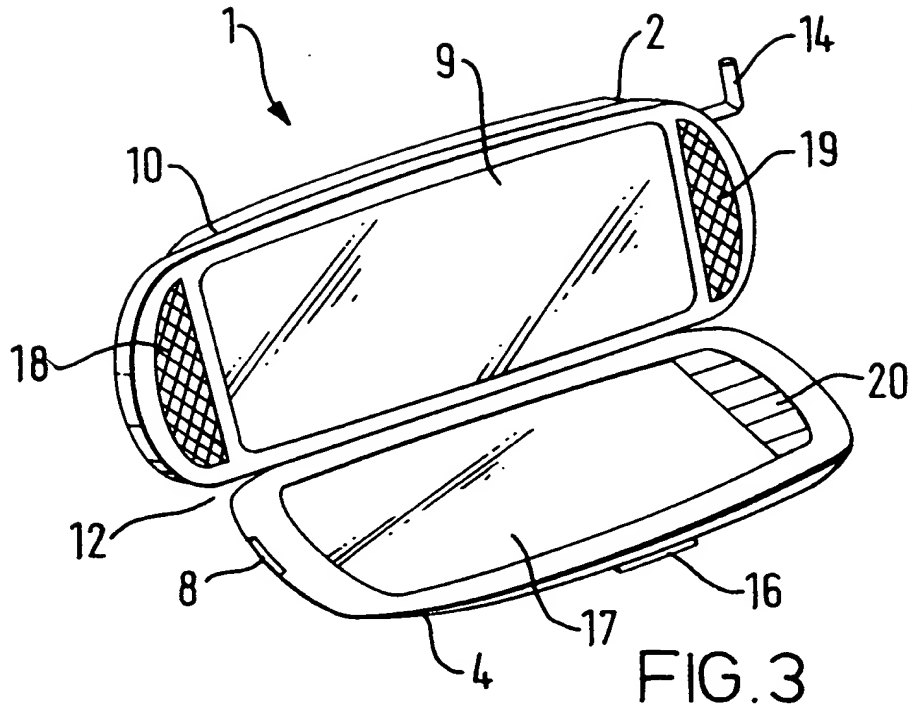


FIG. 3

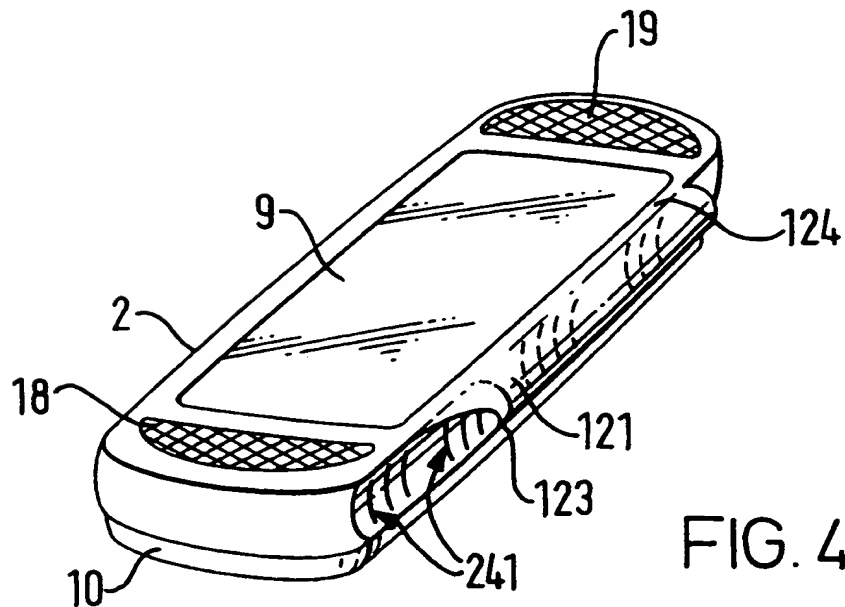


FIG. 4

3 / 4

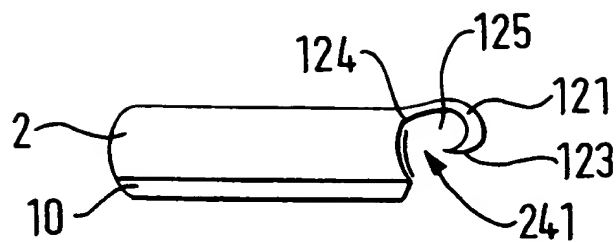


FIG. 5.

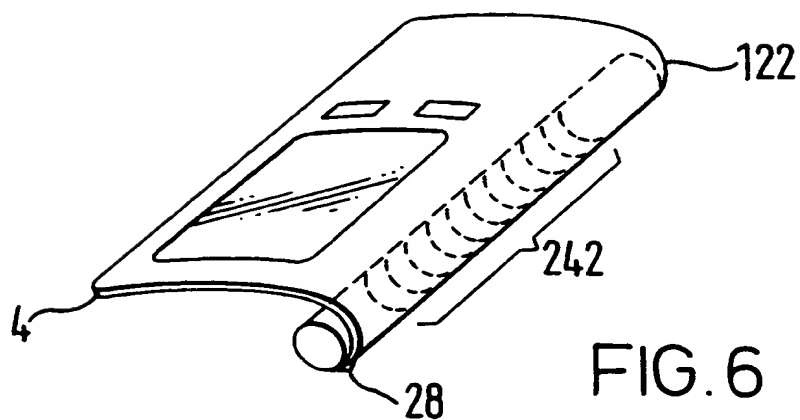


FIG. 6

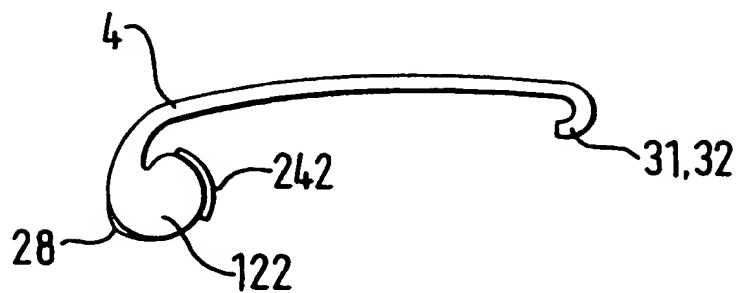


FIG. 7

4 / 4

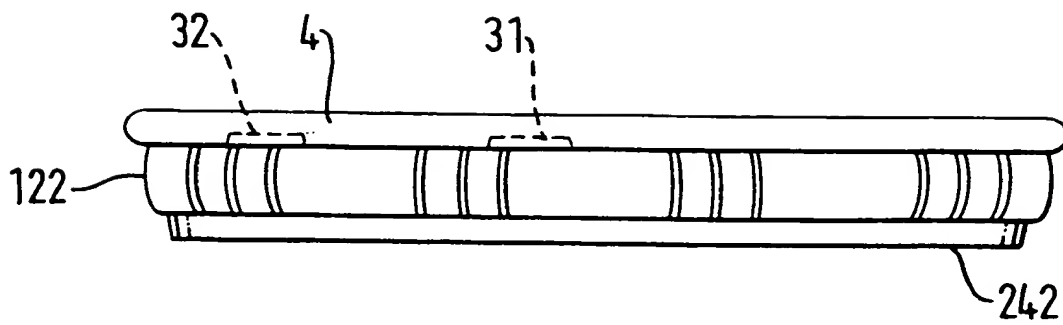


FIG. 8

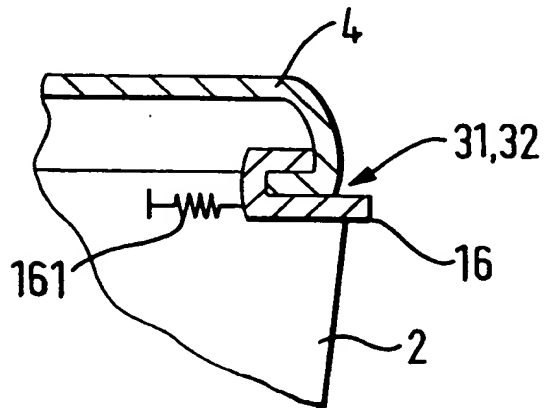


FIG. 9

# INTERNATIONAL SEARCH REPORT

Interr. Application No

PCT/EP 99/00863

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 6 H04M1/02 E05D15/48

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 6 H04M G06F E05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| X          | EP 0 731 589 A (SIEMENS AG)<br>11 September 1996 (1996-09-11)<br>column 1, line 46 - column 2, line 2<br>column 2, line 50 - line 57<br>column 4, line 14 - line 21<br>column 5, line 1 - line 36<br>figures 1-5 | 1                     |
| A          | US 5 476 336 A (OSIECKI ET AL)<br>19 December 1995 (1995-12-19)<br>abstract<br>column 2, line 51 - column 3, line 20<br>column 4, line 34 - line 62<br>column 5, line 18 - line 44<br>figures 3,5-7              | 1,2,4                 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 July 1999

Date of mailing of the international search report

22/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Fragua, M

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/00863

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---------------------|----------------------------|---------------------|
| EP 0731589 A                              | 11-09-1996          | DE 19603483 A              | 12-09-1996          |
|   |                     | FI 961082 A                | 08-09-1996          |
|   |                     | JP 8288988 A               | 01-11-1996          |
|   |                     | US 5719936 A               | 17-02-1998          |
| US 5476336 A                              | 19-12-1995          | CA 2188527 A               | 09-12-1996          |
|   |                     | CN 1148361 A               | 23-04-1997          |
|   |                     | JP 9511961 T               | 02-12-1997          |
|   |                     | WO 9627502 A               | 12-09-1996          |

**THIS PAGE BLANK (USPTO)**